

# GE Infrastructure Sensing

## Features

- Single, dual or differential readings
- Wide probe compatibility for general measurement and specialist applications
- Advanced Cold Junction compensation virtually eliminates errors due to ambient temperature changes
- Data logging with adjustable period or manual recording
- Large backlit display, menu driven interface
- RS232 interface for PC or serial printer
- Robust and weatherproof
- Compact, simple to use, easy to carry
- Convenient, one-handed operation
- Secure grip, impact resistant, elastomer protected

- Plug/play connector for Intelligent Digital Output Sensor (IDOS™) Universal Measurement Modules

## Applications

- Temperature test and measurement
- Batch sampling and environmental monitoring
- Comparison test against reference sensor
- Laboratory standard

The DPI 800 Series is a complete range of advanced, robust and simple to use hand-held instruments. Highly cost effective, these tools are ideal for test/calibration of many popular process parameters. Advanced features and technical innovations address more applications in less time and deliver results you can rely on.

---

## DPI 820 Druck Dual Input Thermometer

DPI 820 is a GE Druck product. GE Druck has joined other GE high-technology sensing businesses under a new name—GE Infrastructure Sensing.



g

# DPI 820 Specifications

	DPI 800	DPI 802	DPI 811	DPI 812	DPI 820	DPI 821	DPI 822	DPI 832	DPI 841	DPI 842
Type	P	P	RTD		°F (°C)	TC	mA/V			
Indicator (measure pressure)	✓	✓								
Calibrator (measure or source)			✓	✓		✓	✓	✓	✓	✓
Thermometer (dual input T1, T2, T1 - T2)					✓					
<b>Dual Capability</b>										
mA measure with 24 V loop power		✓		✓			✓	✓		✓
Switch test			✓	✓			✓	✓		✓
HART resistor			✓	✓			✓	✓		✓
IDOS Universal Measurement Modules	①	①	①	①	①	①	①	①	①	①
<b>Features</b>										
Programmable step and ramp output			✓	✓		✓	✓	✓	✓	✓
Hold, scaling, max/min/avg, filter, alarm, tare	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
25 pressure units, flow scaling, leak test	✓	✓	②	②	②	②	②	②	②	②
1000 point data memory, RS232	③	③	③	③	✓	③	③	③	③	③
<b>Applications</b>										
Measurement and monitoring	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Indicator, controller and recorder testing	✓	✓	✓	✓		✓	✓	✓	✓	✓
Transmitter maintenance and calibration		✓		✓			✓	✓		✓
Process loop set-up and maintenance		✓		✓			✓	✓		✓
Switch, trip and safety system testing		✓		✓			✓	✓		✓

① Optional (please refer to IDOS datasheet) ② When fitted with IDOS pressure module  
③ Optional (please refer to accessories IO800E)

## Temperature Test and Measurement

### DPI 820 Dual Input Thermometer


Two sensor inputs, T1 and T2, allow individual measurement or simultaneous comparisons. For differential applications; e.g. heating boiler bypass, T1 minus T2 can be displayed

### Interchangeable Probes and Wide Thermocouple Compatibility

Allow general temperature measurement or the use of special sensors for demanding applications; e.g. high temperature, hygienic and aggressive media

### Advanced Features

Hold, maximum/minimum/average, (with time stamp), tare (offset) and damping filter facilitate system checks and troubleshooting

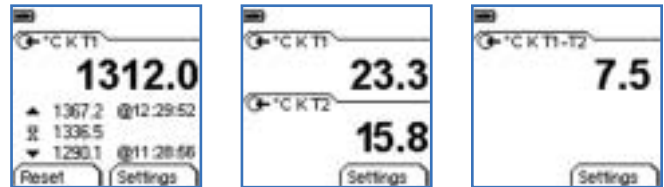

## Temperature Data Logging, Analysis and Documentation

### Periodic Data Logging

Records processes and systems over time

### Manual Logging

Record screen snapshots for batch sampling and environmental monitoring. All data is date/time stamped.

### Review Data

On-screen or upload to a PC via RS232 interface (see accessories for lead). No software purchase is necessary as standard Microsoft® applications provide data transfer (HyperTerminal) and analysis (Excel). Alternatively, print directly to a compatible serial printer.



## Data Logging

**Memory:** 1000 single or 750 dual reading screens with date and time

**Header Tag:** 6 user characters to identify groups of readings

**RS232:** 19.2 k baud, 8 data bits, 1 stop bit, no parity, Xon/Xoff

**Data Output:** Comma separated ASCII

# DPI 820 Specifications

## IDOS Flexibility

### Intelligent Digital Output Sensor (IDOS)

Universal Pressure Modules are available from 10 in H<sub>2</sub>O to 10,000 psi (25 mbar to 700 bar).

### Total Flexibility

IDOS modules can be used with any compatible instrument; for example, a DPI 820 thermometer can become a fully featured pressure indicator or can read pressure and temperature simultaneously.

### Plug and Play

Modules are interchangeable between instruments, requiring no set-up or instrument calibration.

*Please refer to IDOS UPM data sheet.*

### DPI 820 specifications

*\*Accuracy includes operation from 50°F to 86°F (10°C to 30°C), one year stability and calibration uncertainty.*

Type	Standard	*Accuracy	Range
K	IEC 584	1.1°F (0.6°C)	-454°F to 2498°F (-270°C to 1370°C)
J	IEC 584	0.9°F (0.5°C)	-346°F to 2192°F (-210°C to 1200°C)
T	IEC 584	0.6°F (0.3°C)	-454°F to 752°F (-270°C to 400°C)
B	IEC 584	1.8°F (1.0°C)	122°F to 3308°F (50°C to 1820°C)
R	IEC 584	1.8°F (1.0°C)	-58°F to 3216°F (-50°C to 1769°C)
S	IEC 584	2.5°F (1.4°C)	-58°F to 3216°F (-50°C to 1769°C)
E	IEC 584	0.7°F (0.4°C)	-454°F to 1832°F (-270°C to 1000°C)
N	IEC 584	1.1°F (0.6°C)	-454°F to 2372°F (-270°C to 1300°C)
L	DIN 43710	0.6°F (0.3°C)	-328°F to 1652°F (-200°C to 900°C)
U	DIN 43710	0.6°F (0.3°C)	-328°F to 1112°F (-200°C to 600°C)
C		1.8°F (1.0°C)	32°F to 4208°F (0°C to 2320°C)
D		1.8°F (1.0°C)	32°F to 4523°F (0°C to 2495°C)


*Accuracies quoted for mid range and do not include sensor error*

### Temperature Coefficient

14°F to 50°F, 86°F to 122°F; 0.005°F/°F  
(-10°C to 10°C, 30°C to 50°C; 0.01°C/°C)

### Unique Cold Junction Compensation

Virtually eliminates ambient temperature errors. (Patent pending). 0.4°F (0.2°C) maximum error for 86°F (30°C) change in ambient temperature

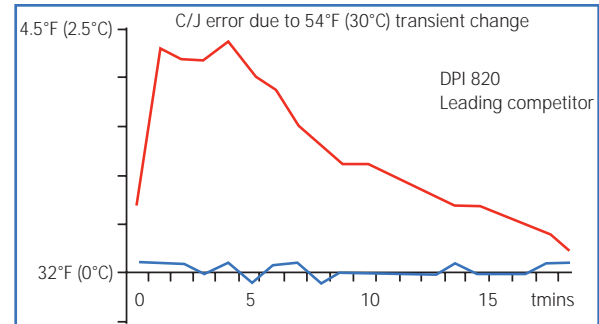

### Thermocouple connectors

Mini-jack sockets for T1 and T2 inputs

## DPI 800 Series Common Specification

### Operating Temperature

14°F to 122°F (-10°C to 50°C)

### Storage Temperature

-4°F to 158°F (-20°C to 70°C)

### Humidity

0% to 90% non-condensing, Def Stan 66-31m 8.6 Cat III

### Shock and vibration

BS EN61010:2001, Def Stan 66-31, 8.4 Cat III

### EMC

BS EN61326-1:1998 + A2:2001

### Safety

Electrical BS EN61010:2001. CE marked

### Display

Graphic LCD with backlight. Resolution 99999

### Size (l x w x h) and Weight

7.1 in x 3.3 in x 2 in (180 mm x 85 mm x 50 mm),  
14 oz (400 g)

### Batteries

3 AA alkaline, >80 hours use

# DPI 820 Specifications

## Accessories

### IO800A

Soft fabric carrying case with accessory pocket

### IO800B

Belt clip, wrist strap/hanging loop and bench stand

### IO800C

NiMh batteries with charger (charged externally)

### IO800D

RS232 lead: DPI 800 to PC 9 way 'D' type

## Ordering Information

Please state the model number DPI 820 and accessories as separate items.

*Each unit is supplied with batteries, calibration certificate, user guide and two general purpose type 'K' bead thermocouples range -103°F to 482°F (-75°C to 250°C) Class I.*

## Related Products

GE is a world leader in the design and manufacture of pressure, temperature and electrical field calibrators, laboratory/workshop calibration equipment and pressure sensors.



©2005 GE Infrastructure Sensing, Inc. All rights reserved.  
920-113A



All specifications are subject to change for product improvement without notice. GE® is a registered trademark of General Electric Co. Other company or product names mentioned in this document may be trademarks or registered trademarks of their respective companies, which are not affiliated with GE.

[www.gesensing.com](http://www.gesensing.com)